



Western Wire

Hill Patterned Hog Rings

Standard Pack

- Copper Coated Rings Supplied
- 100 Pieces per Box
- 10 Boxes per Display Carton
- 1000 Pieces Total
- Sold per Display Carton

Stainless

- Bulk Packed
- .093" Diameter

Hog Rings - Actual Size Images



#1 Pig
5/8" Opening
1-5/32" Wide
Per 1000-4.3 lbs.



#2 Shoat
3/4" Opening
1-5/16" Wide
Per 1000-4.7 lbs.



#3 Hog
7/8" Opening
1-1/2" Wide
Per 1000-5.2 lbs.

Bulk Package


- 13 Gauge Galvanized or 12 1-1/2 Gauge Copper Coated
- Packed in 25 lb. Cartons Only
- Special Gauge & Size Requirements Quoted on Request

Ring Size	Appromate Rings per CWT.
#1 Pig	25,000
#2 Shoat	22,500
#3 Hog	20,000



Handy Hog Ringers

- Standard - .5 lbs. (approximate wt.)
- Heavy Duty - .75 lbs. (approximate wt.)

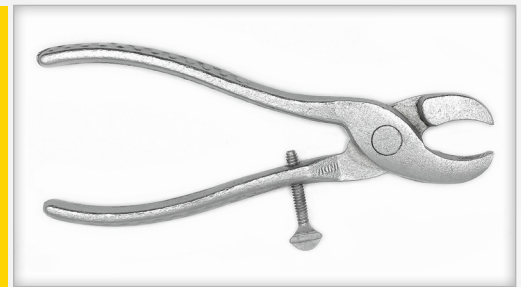

Upholstery Ring Fasteners

- General Purpose
- 14 Gauge Basic Wire
- Bulk Packed in 25 lb. Cartons Only
- Approximately 40,000 Rings per CWT



1/2" Opening
13/16" Wide

Fencing Rings

- Made of 9 Gauge Galvanized Material
- Bulk Packed in 25 lb. Cartons Only
- Approximately 8,200 Rings per CWT




1/2" Opening
13/16" Wide

Ring Cotters

- MB Spring Wire, Zinc Coated
- Type 302 Stainless Steel

Part #	O.D. X Wire Dia.	Use on Diameter	Weight per M
3703	5/8 X .048	3/16 X 1/4	1.4
3705	3/4 X .048	1/4 X 5/16	1.6
3707	1 X .062	3/8 X 7/16	4
3709	1-1/8 X .072	7/16 X 1/2	5.8

Ring Cotters - Actual Size Images

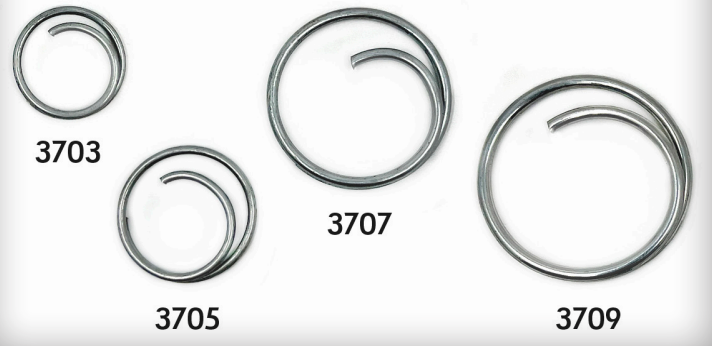

Key Rings


- Spring Steel, Nickel & Zinc Coated



Part #	Inside Dia.	Thickness A-B (+/- .010)		Wt. per M
KR 1	.335	.056	.083	1.1
KR 3	.425	.063	.093	1.7
KR 5	.550	.077	.103	3.5
KR 7	.719	.092	.120	5.1
KR 8	.833	.080	.127	6.6
KR 9	.970	.092	.120	7.6
KR 10	1.11	.088	.139	10.6
KR 11	1.188	.109	.156	14.6
KR 12	1.315	.098	.172	16.1

Ring Clips - Zinc Coated

- Stainless Steel Quoted upon Request

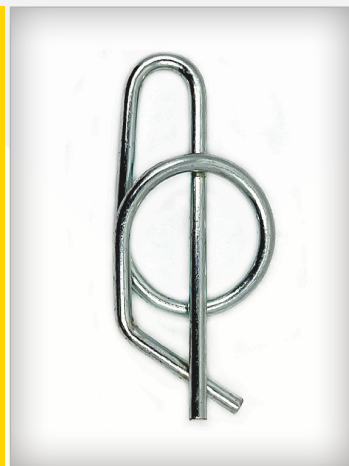

Part #	Fits Shaft Size	Shaft Clearance	Wire Dia.	Overall Length	Weight per M
RC-8	1/4 Heavy	.267/.257	.041	.844	1.1
RC-9H	1/4 Extra Heavy	.270/.260	.054	.936	1.8
RC-10	5/16 Regular	.330/.320	.047	1.044	1.8
RC-14	3/8 Regular	.392/.382	.054	1.214	2.3
RC-22	1/2 Regular	.520/.510	.062	1.420	4.1
RC-24	1/2 Heavy	.520/.510	.072	1.456	6.8
RC-30	5/8 Regular	.645/.635	.072	1.690	7.9
RC-34	3/4 Regular	.770/.760	.080	2.081	10.0
RC-36	3/4 Heavy	.770/.760	.091	2.166	13.0
RC-40	7/8 Heavy	.895/.885	.105	2.506	20.6
RC-42	1 Regular	1.020/1.010	.105	2.756	22.8