


APPLICATION CONDITIONS	MIN.	NOM.	MAX.
TEMPERATURE (°F)			
PRESSURE (PSI)			
SPEED (SFPS)			
STROKE LENGTH (IN)			
CYCLE RATE (CYL/SEC)			
MEDIA			

BILL OF MATERIALS				
ITEM	QTY	PART#	MATERIAL	DESCRIPTION

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	ECN #
2	A	ADDED BLANK NUMBER AND DIMENSIONS	5/24/2018	8524
4	B	REVISED FOR BETTER SPRING ALIGNMENT	4/22/2021	1422

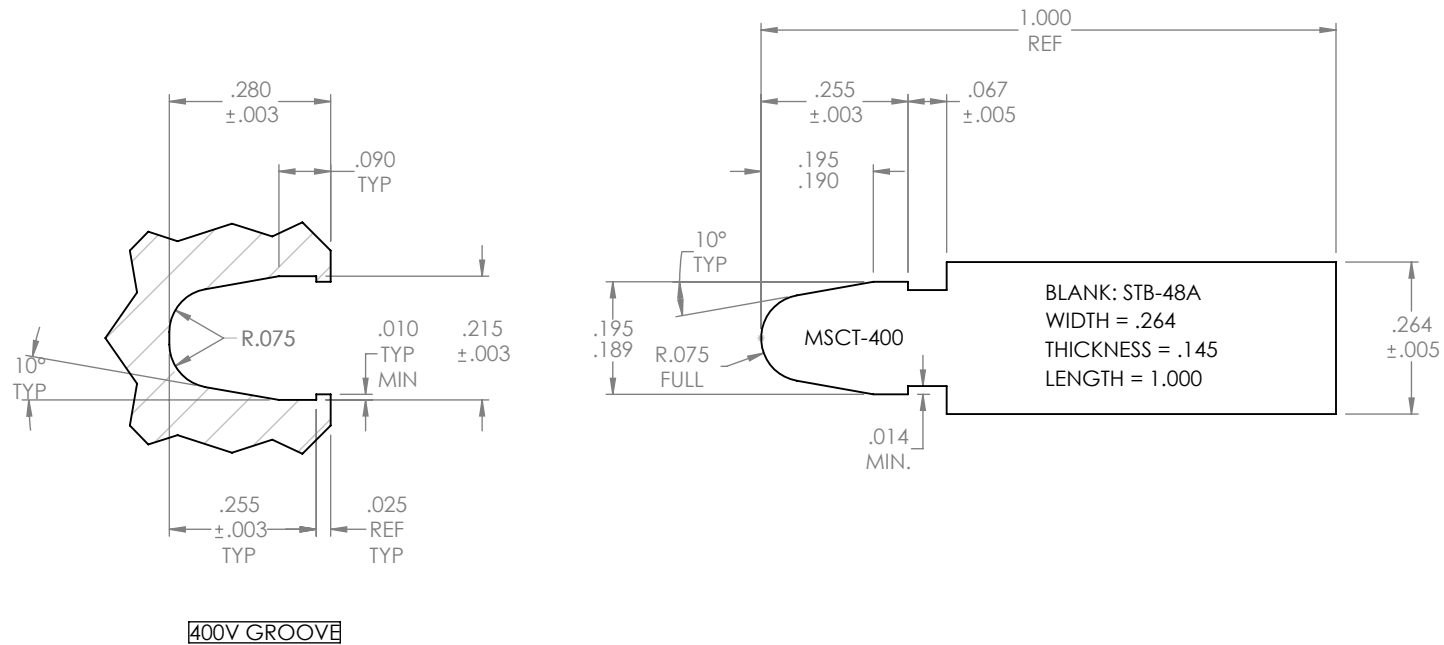

----- Q

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MW INDUSTRIES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MW INDUSTRIES, INC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN INCHES	DRAWN L. DOUGLAS	2/15/18
TOLERANCES:	MFG REVIEW	
FRACTIONAL ± 1/16"	ENG APPR. [Signature]	2/15/18
ANGULAR: ± .5°		
TWO PLACE DECIMAL ±.01		
THREE PLACE DECIMAL ±.005		
JACKET MATERIAL:	COMMENTS:	
SPRING TYPE: 400 V-SPRING		
O-RING:		
DO NOT SCALE DRAWING		

**MAUDLIN PRODUCTS**  
 MW Industries, Inc.

**TITLE:**  
 GENERAL ARRANGEMENT  
 400 V-SPRING  
 GROOVE AND TOOL

SIZE <b>A</b>	DWG. NO. MSCT-400	REV <b>B</b>
------------------	----------------------	-----------------

SCALE: NTS SHEET 1 OF 1