




Western Wire

Hitch Pin Clips





They are also known as Hairpin Cotters, Bridge Pins, R-Keys, R-Clips or Presto Pins. These are one of the more economical fasteners and may be reused or utilized for a single use application. Their common purpose is to fasten to the ends of either hitch pins or clevis pins, providing a quick, strong and secure connection.

We stock a large variety of sizes and finishes. Hitch Pin Clips are manufactured from MB spring wire, and available in plain and various plated finishes. We also manufacture them in various types of stainless steel.

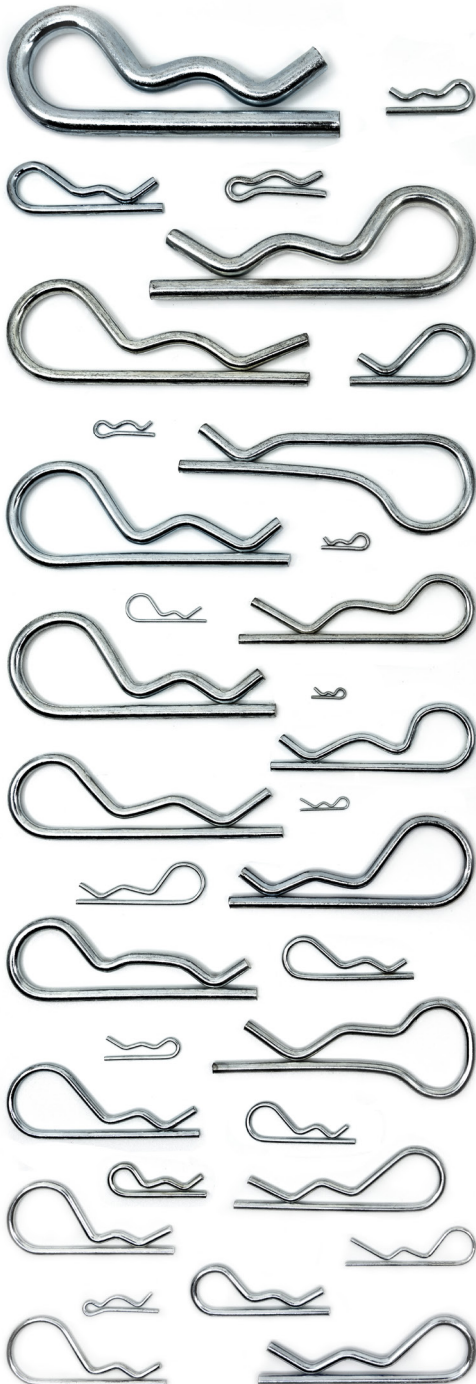


WWP #	Wire Dia.	Drill Hole	Shaft Dia.	Overall Lgth.	inside Eye Dia.	Wt. Per 1000
231	.028	1/32	1/8 - 5/32	.600	.093	1/4
226	.032	.040	7/64 - 9/64	7/16	.078	1/4
232	.042	.047	1/16 - 1/8	7/16	.080	1/3
223	.042	3/64	3/16 - 1/4	1	1/4	7/8
221	.047	1/16	1/8 - 3/16	19/32	1/8	5/8
224	.047	1/16	1/4 - 3/8	1-9/16	5/16	1-3/4
240	.047	1/16	1/4 - 5/16	.90	.090	1
236	.054	1/16	3/16 - 1/4	3/4	1/8	1
237	.054	1/16	1/4 - 3/8	7/8	9/64	1-1/4
222	.062	5/64	1/4 - 1/2	1-5/16	5/16	2-1/2
218	.062	5/64	3/8 - 1/2	1-9/16	3/8	3
225	.072	5/64	5/16 - 3/8	1-3/32	9/64	2-5/8
239	.072	5/64	3/8 - 1/2	1-7/8	5/8	5-1/2
213	.080	3/32	1/4 - 3/8	1-3/16	1/4	3-3/4
217	.080	3/32	3/8 - 1/2	1-9/16	3/8	5
203	.093	7/64	1/4 - 1/2	1-5/8	3/8	7
207	.093	7/64	3/8 - 5/8	2-5/16	5/8	10
228	.093	7/64	5/16 - 1/2	2	5/8	9
214	.093	7/64	1/2 - 3/4	2-1/2	9/16	10-1/4
233	.093	7/64	1/4 - 1/2	1-1/8	1/4	4-5/8
230	.105	1/8	5/16 - 3/8	1-1/4	1/8	6
215	.125	9/64	1/2 - 3/4	1-9/16	1/2	12
216	.125	9/64	1/2 - 3/4	1-15/16	7/16	14-3/4
211	.125	9/64	7/16 - 3/4	2-9/16	9/16	19-1/2
227	.125	9/64	5/8 - 7/8	2-1/2	5/8	19
238	.125	9/64	3/4 - 1-1/8	2-7/8	5/8	22
202	.125	9/64	3/4 - 1-1/8	3-1/8	1	23-3/4
201	.148	5/32	1/2 X 5/8 - 5/8 X 1	3	1/2	31-1/2
209	.148	5/32	3/4 - 1-1/8	3-5/16	3/4	36
210	.148	5/32	5/8 - 1	2-15/16	3/4	32
205	.162	3/16	7/8 - 1-1/16	2-3/16	7/8	31
204	.162	3/16	1/2 X 3/4 - 5/8 X 1	3	5/8	37-3/4
212	.162	3/16	1/2 X 1 - 7/8 X 1	3-7/16	7/8	44-3/4
229	.177	3/16	3/4 - 1-1/16	3-1/2	15/16	56-1/4
206	.177	3/16	5/8 - 1	3-1/4	15/16	51-1/2
208	.177	3/16	7/8 - 1-1/4	3-3/4	15/16	59
219	.243	17/64	3/4 - 1	4	15/16	115
235	.243	17/64	1-1/4 - 1-1/2	5-1/8	1-1/2	165
234 Gov't	.250	17/64	3/4 - 1	3-1/4	3/4	92
220	.310	21/64	7/8 - 1	4-1/16	7/8	175

Hitch Pin Clips - Actual Size Images

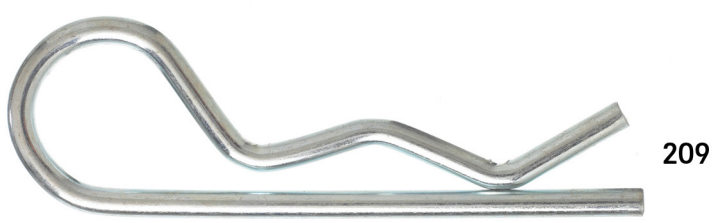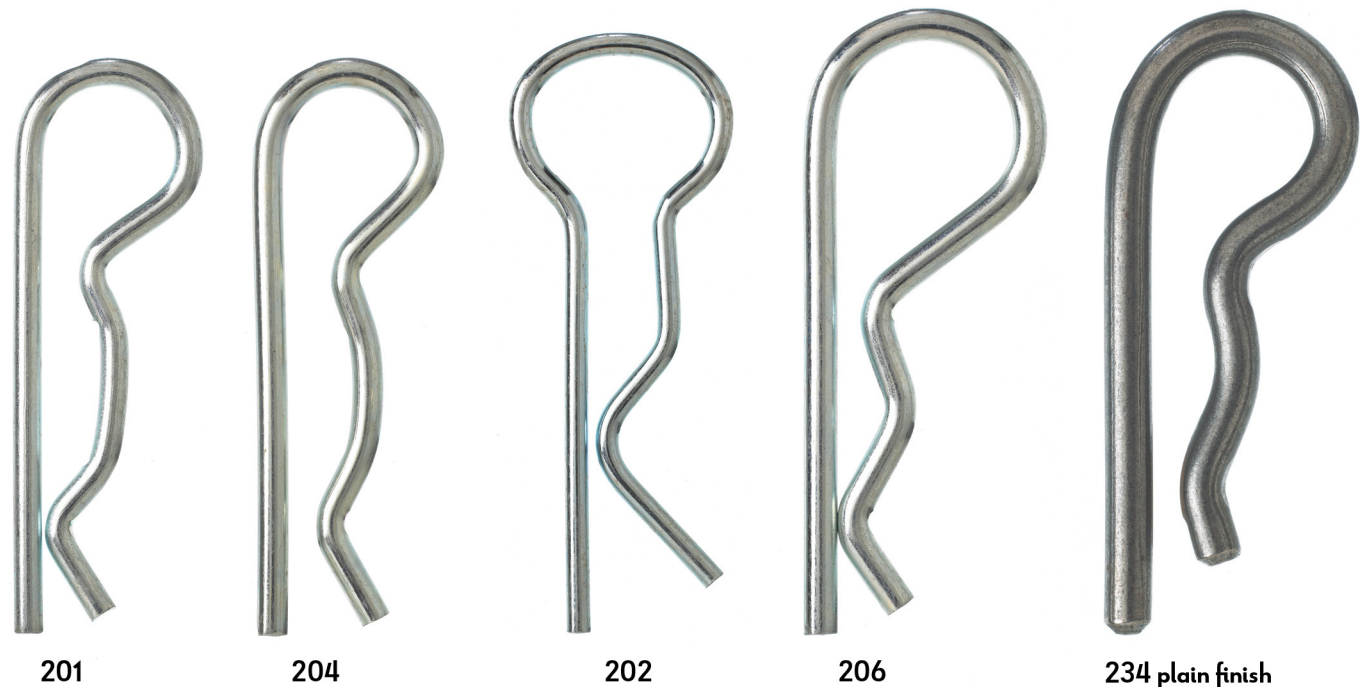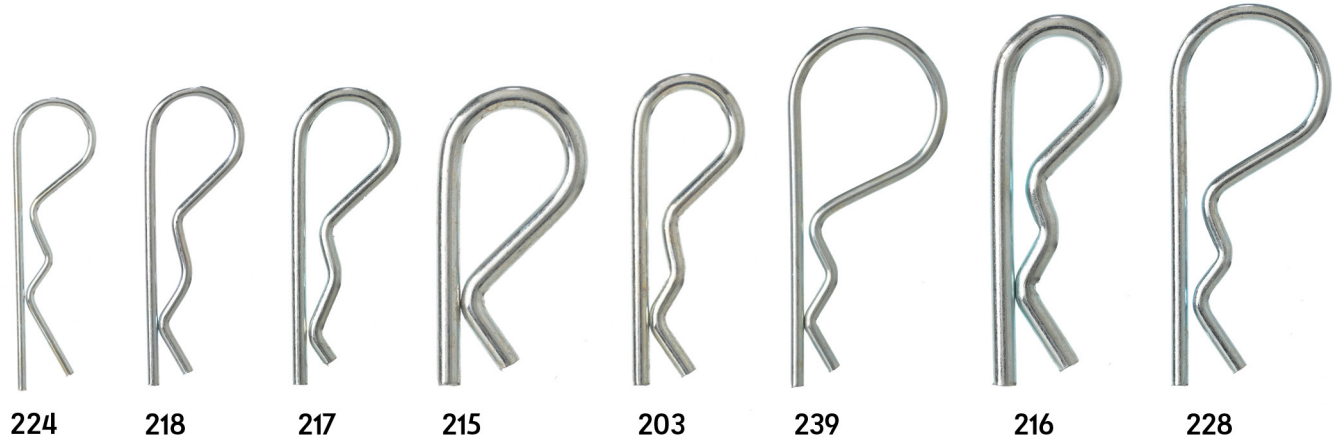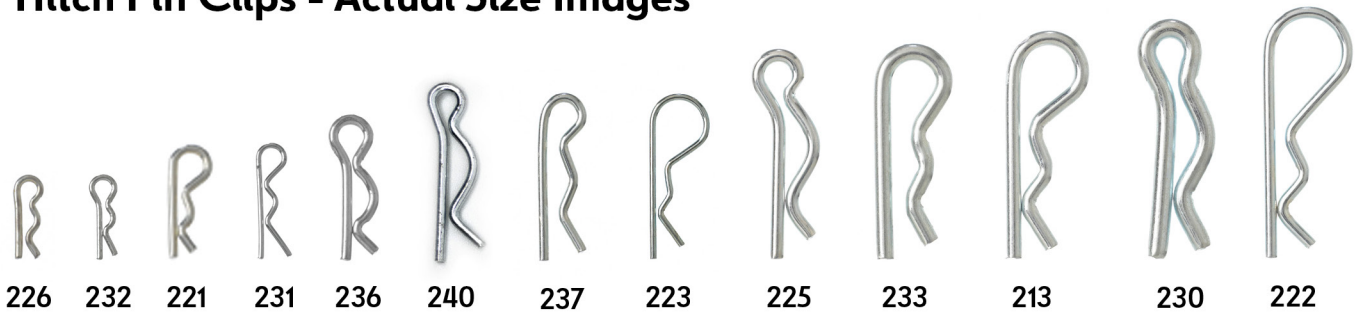

Hitch Pin Clips - Actual Size Images

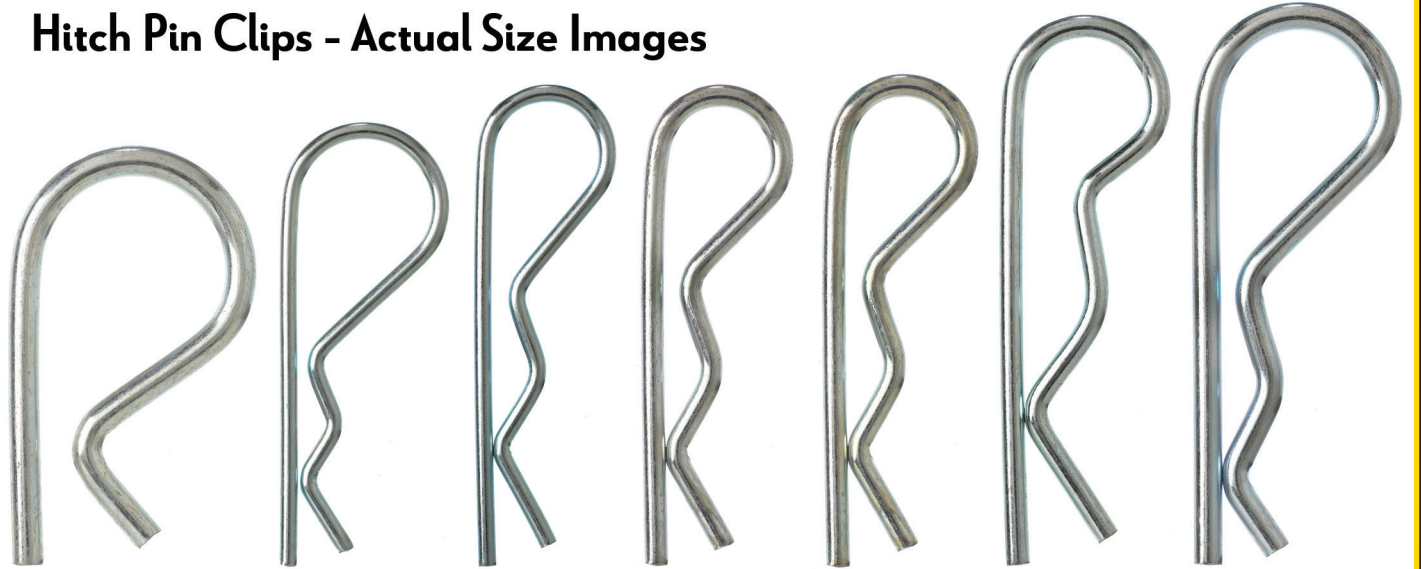

205

207


214

227

211

238

210

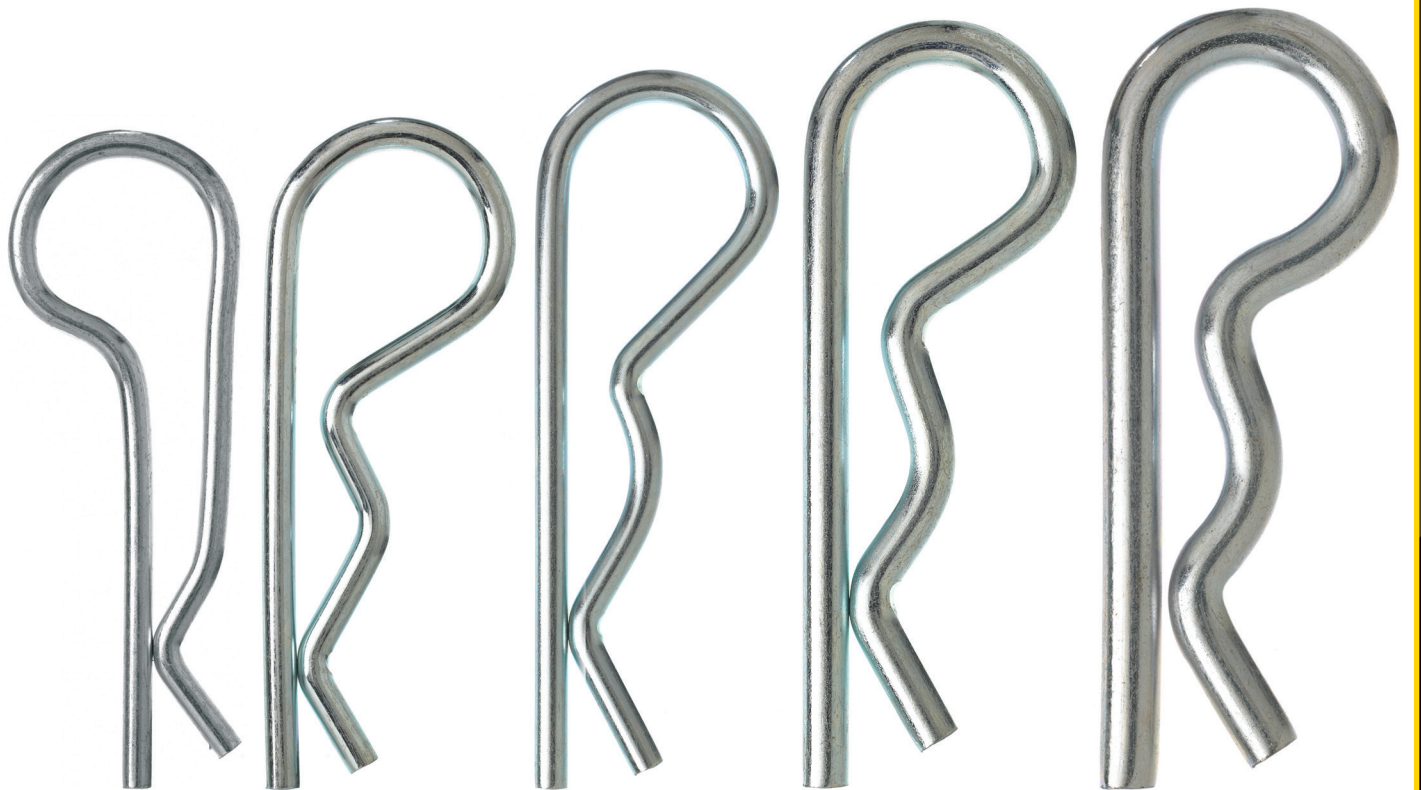


212

229

208

219

220

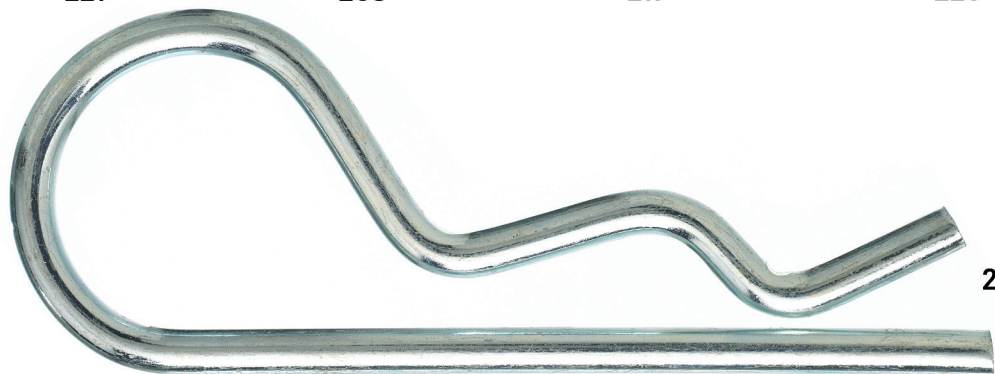

235




Western Wire

Grip Clips

Our MB spring wire Grip Clips are also known as Twist Clips and Self-locking Pins. The bent portion of the leg snaps over another pin to provide an added secure connection. We offer these in plain steel, plated and stainless steel.

WWP #	Wire Dia.	Inside Eye Dia.	Recommended Shaft Sizes	Overall Length	Wt. Per 1000
3616	.125	7/16	3/8 X 5/8	2	14-3/4
3611	.125	9/16	7/16 X 3/4	2-9/16	19-1/2
3610	.148	3/4	5/8 X 1	2-3/4	32
3608	.177	15/16	7/8 X 1-1/4	3-3/4	59

Grip Clips - Actual Size Images

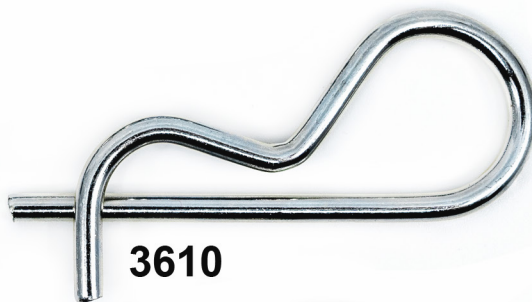


3610



3616



3611

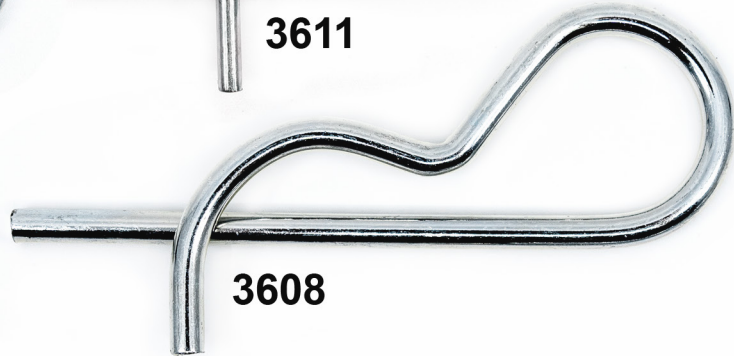

3608

Specialty Hitch Pin Clips

If you do not see what you need among our standard stock items, we can produce clips made to your specifications. We can offer custom parts in a variety of materials and finishes to include plain steel, plated and stainless steel. Contact us for all the details.



ISO 9001:2015
QUALITY MANAGEMENT
SYSTEM CERTIFIED



Made in the USA
Since 1914

770 Sun Park Drive Fenton, MO 63026
Phone: 1(800) 325-3770 or Fax: (636) 305-1119
Email: sales@westernwireusa.com
www.westernwireusa.com